

PRODUCT DATA SHEET

Bitumen Impregnated Boards

EXPANSION JOINT FILLER

DESCRIPTION

A preformed expansion joint filler board for joint in all concrete structures and brick structures.

It is manufactured from high grade slow growing scandinavian wood fibers which are bitumen impregnated and compounded into a compressible non extruding board.

USES

- For joint filler board in concrete highways, paving curbs, gutter and floors


CHARACTERISTICS / ADVANTAGES

- Withstand repeated cycles of expansion and compression without extruding
- Recovery to min. 75% thickness after compression
- Virtually unaffected by temperature changes
- Low moisture absorption
- Durable and easy to handle

PRODUCT INFORMATION

Packaging	2.1. x 1.2 m
Thickness	10 mm 12 mm 19 mm 25 mm

Joint Design

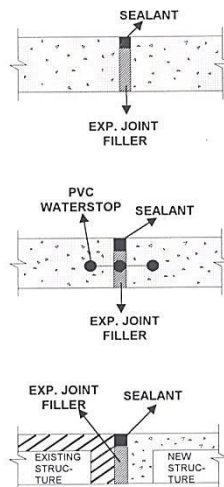

APPLICATION INSTRUCTIONS

SUBSTRATE PREPARATION

Should be stored on a flat sound surface.

Can be cut to size on site with a sharp knife or any normal hand and circular saw.

APPLICATION

Expansion Joint Filler is installed against existing concrete at columns and against adjacent structures or flat work before the placement of the subsequent concrete.

For floors, paving and runways it is install 1 cm below the elevation of the concrete surface when the joints is to be filled later to the surface elevation with a proper sealant.

BASIS OF PRODUCT DATA

All technical data stated in this Product Data Sheet are based on laboratory tests. Actual measured data may vary due to circumstances beyond our control.

LOCAL RESTRICTIONS

Please note that as a result of specific local regulations the declared data and recommended uses for this product may vary from country to country. Please consult the local Product Data Sheet for the exact product data and uses.

ECOLOGY, HEALTH AND SAFETY

For information and advice on the safe handling, storage and disposal of chemical products, users shall refer to the most recent Safety Data Sheet (SDS) containing physical, ecological, toxicological and other safety-related data.

LEGAL NOTES

The information, and, in particular, the recommendations relating to the application and end-use of Sika products, are given in good faith based on Sika's current knowledge and experience of the products when properly stored, handled and applied under normal conditions in accordance with Sika's recommendations. In practice, the differences in materials, substrates and actual site conditions are such that no warranty in respect of merchantability or of fitness for a particular purpose, nor any liability arising out of any legal relationship whatsoever, can be inferred either from this information, or from any written recommendations, or from any other advice offered. The user of the product must test the product's suitability for the intended application and purpose. Sika reserves the right to change the properties of its products. The proprietary rights of third parties must be observed. All orders are accepted subject to our current terms of sale and delivery. Users must always refer to the most recent issue of the local Product Data Sheet for the product concerned, copies of which will be supplied on request.

PT. Sika Indonesia

Jl. Raya Cibinong-Bekasi km.20.

Cileungsi, Bogor 16820 - Indonesia

Tel. +62 21 8230025

Fax. +62 21 8230026

Website: idn.sika.com

email: sikacare@id.sika.com



PRODUCT DATA SHEET
Bitumen Impregnated Board
February 2017